

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 414 145 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
28.04.2004 Bulletin 2004/18

(51) Int Cl.7: **H02M 7/48**

(21) Application number: 02755717.2

(86) International application number:
PCT/JP2002/007800

(22) Date of filing: 31.07.2002

(87) International publication number:
WO 2003/015254 (20.02.2003 Gazette 2003/08)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR

(30) Priority: 02.08.2001 JP 2001234824

(71) Applicant: **TOYOTA JIDOSHA KABUSHIKI
KAISHA**
Toyota-shi, Aichi 471-8571 (JP)

(72) Inventors:
• **SATO, Eiji**
Toyota-shi, Aichi 471-8571 (JP)
• **SHAMOTO, Sumikazu**
Toyota-shi, Aichi 471-8571 (JP)


• **KOMATSU, Masayuki**
Toyota-shi, Aichi 471-8571 (JP)
• **OKI, Ryoji**
Toyota-shi, Aichi 471-8571 (JP)
• **NAKAMURA, Makoto**
Toyota-shi, Aichi 471-8571 (JP)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Tiedtke-Bühling-Kinne & Partner GbR,
TBK-Patent,
Bavariaring 4
80336 München (DE)

(54) **MOTOR DRIVE CONTROL APPARATUS**

(57) On end of a reactor (L1) is connected to a positive electrode of a battery (B1) and the other end is connected to a power line via a transistor (Q1) and to the ground via a transistor (Q2). By PWM control of the transistors (Q1, Q2), an arbitrary increased voltage is obtained in the power line. It is possible to obtain an optimal inverter input voltage (power line voltage) according to the motor drive state, thereby increasing efficiency. Thus, it is possible to optimize the inverter input voltage according to the motor drive condition.

Fig. 1

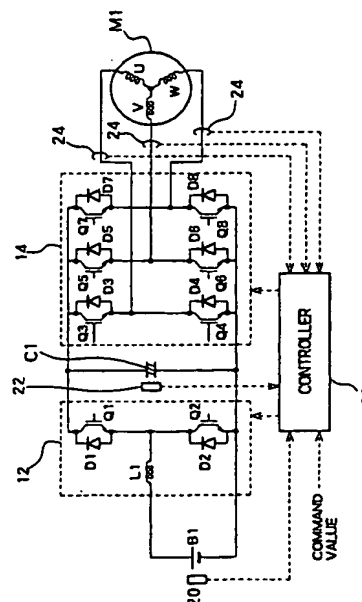

EP 1 414 145 A1

Description

TECHNICAL FIELD

[0001] The present invention relates to a motor drive controller for supplying output from a dc power source to a motor through an inverter, and controlling drive of the motor.

BACKGROUND ART

[0002] Conventionally, a hybrid vehicle or an electric vehicle has a motor for traveling, and traveling is accomplished by driving this motor. A battery is therefore required to supply electrical power to the motor, and a high voltage battery of a few hundred volts is normally used in order to efficiently supply electrical power to a high output motor. On the other hand, various components (accessories) operated by electrical power are mounted in the vehicle, and a 12V battery (low voltage battery) is used as a battery for these accessories. High voltage output of the high voltage battery is then stepped down to 12V using a converter to charge the low voltage battery.

[0003] Also, in a high rotational speed region of the motor, a counter electromotive force is large, which means that if the voltage applied to the motor is low, maximum torque for the high rotational speed range will become small.

[0004] In Japanese Patent Laid-open No. Hei 10-136570, a converter is arranged between a battery and an inverter and a boosted voltage is supplied to the inverter using the converter. It is therefore possible to apply a high voltage from the inverter to the motor, and it is possible to increase maximum torque in a high rotational speed range of the motor. This publication also proposes using a converter as a rectifier for when charging from the outside.

[0005] The above publication therefore shows boosting of a battery voltage using a converter and supply of that boosted voltage to a motor. However, this publication simply discloses boosting a supply to a motor and does not consider control of the operation in boosting by the controller.

DISCLOSURE OF THE INVENTION

[0006] The object of the present invention is to provide a motor drive controller that can optimize inverter input voltage in response to motor drive conditions.

[0007] The present invention is a motor drive controller for supplying output of a dc power source to a motor through an inverter and controlling drive of a motor, comprising a converter for voltage converting output voltage from the dc power source for supply to the inverter, and a control section for controlling supply current to the motor through PWM control of the inverter, the converter comprising a reactor connected at one end to the dc

power source and at least two switching elements, being an upper switching element connecting the other end of the reactor to a power source side of the inverter and a lower switching element connecting to an earth side of the inverter, wherein the control section calculates an inverter input voltage target value appropriate to efficiently drive a motor in response to rotational speed of the motor and a target output torque, and performs PWM control of the converter switching elements in order to achieve this input voltage target value.

[0008] With the present invention, it is therefore possible to increase inverter input voltage above the battery voltage because of the inverter. Since motor output is a product of voltage applied to the motor and motor current, it is possible to reduce motor current for the same motor output by increasing the voltage applied to the motor. It is possible to reduce inverter current capacity by increasing the inverter input voltage, to therefore enable miniaturization and cost reduction of the inverter. Also, since output in a high rotational speed range of the motor is increased by increasing the voltage applied to the motor, this resultantly enables miniaturization and cost reduction of the motor.

[0009] In particular, with the present invention an optimum voltage to be applied to the motor at any given time is calculated based on the rotational speed of the motor and a target output torque (output torque command), and an inverter input voltage target value is determined based on this calculated optimum voltage. As a result, efficient drive of the motor is carried out by applying the optimum voltage based on running conditions of the motor at that time. In particular, since the optimum voltage is calculated and this voltage controlled, it is possible to prevent deterioration in efficiency due to the voltage rising beyond what is necessary.

[0010] Also, the converter preferably has a three phase structure provided with three sets of the reactor and the two switching elements. With this structure, it is possible to smooth the output voltage to suppress the occurrence of ripple.

[0011] It is also preferable, in the case where the inverter input voltage target value is lower than the dc source voltage, to turn the upper switching element of the inverter on and turn the lower switching element off. When the motor is rotating at low speed, an input target voltage of the inverter to drive efficiently becomes smaller than the voltage of the dc power source. At this time, turning the upper switching element of the inverter on and turning the lower switching element off does not produce any switching loss at the same time as setting to the converter minimum drive voltage, which enables efficient drive.

[0012] It is also preferable for the converter to have a full bridge configuration with both ends of a battery and one end of a reactor being connected through two switching elements. With this structure, it also becomes possible to step-down the dc power source output, and to always have the optimum inverter applied voltage.

[0013] It is also preferable to connect a separate inverter for supplying current to a separate motor to the output of the converter, and for the control section to output a higher voltage of two inverter input target voltages calculated from the rotational speeds and target outputs of the two motors. With a two motor system, inverter input voltage to obtain the most efficient drive for respective motors will often differ. When the inverter input voltage is high, only switching loss is increased, but when the input voltage is low, motor current also increases and loss of both the motor and inverter increases. This means that efficiency is better with a high voltage. It is thus possible to raise overall efficiency by selecting the higher of the respective inverter input target voltages.

[0014] When the calculated inverter input target voltage exceeds a specified upper limit value, the control section preferably sets the input target voltage to the upper limit value.

[0015] The present invention also provides a motor drive control method for a two motor system, comprising a converter, including a reactor, having one end connected to a dc power source, and at least two switching elements, being an upper switching element connecting the other end of the reactor to a power source side of an inverter, and a lower switching element connecting to an earth side of the inverter, two inverters for receiving output from the converter and converting to a specified alternating current, and two motors respectively driven by alternating current from the two inverters, wherein inverter input voltage target values suitable for efficient drive of the two motors are calculated in response to rotation speed and target output torque of the two motors, and a higher voltage of the two calculated inverter input voltage target values is selected as a target value and the switching elements of the inverter are subjected to PWM control.

[0016] The present invention also provides a motor drive control program for a two motor system, comprising a converter, including a reactor, having one end connected to a dc power source, and at least two switching elements, being an upper switching element connecting the other end of the reactor to a power source side of an inverter, and a lower switching element connecting to an earth side of the inverter, two inverters for receiving output from the converter and converting to a specified alternating current, two motors respectively driven by alternating current from the two inverters, and a control section for controlling switching of the switching elements of the converter, or a medium storing such a program, wherein, in the control section, inverter input voltage target values suitable for efficient drive of the two motors are calculated in response to rotation speed and target output torque of the two motors, a higher voltage of the two calculated inverter input voltage target values is adopted as a target value, and the switching elements of the inverter are subjected to PWM control so that converter output becomes the adopted target value.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

Fig. 1 is a drawing showing the structure of an embodiment of the present invention.

Fig. 2 is a control block diagram for a control device.

Fig. 3 is a flowchart showing operation of an inverter input voltage command operation section.

Fig. 4 is a drawing showing a relationship between torque command T and induced voltage constant K (T).

Fig. 5 is a drawing showing the relationship between rotational speed N and inverter input voltage target value V_{dc} .

Fig. 6 is a flowchart showing a processing operation of the control section.

Fig. 7 is a drawing showing the structure of another embodiment (three phase structure).

Fig. 8 is a drawing the structure of yet another embodiment (full bridge structure).

Fig. 9 is a drawing the structure of a still further embodiment (two motor system).

Fig. 10 is a flowchart showing a processing operation in the case of a 2-motor system.

BEST MODE FOR CARRYING OUT THE INVENTION

[0018] Embodiments of the present invention will now be described below based on the drawings.

[0019] Fig. 1 is a drawing showing the structure of one embodiment, where a battery $B1$, being a dc power source, is a secondary battery such as a nickel metal hydride (NiMH) or lithium ion battery. One end of a reactor $L1$ is connected to the positive electrode of the battery $B1$. The other end of the reactor $L1$ is connected to an intermediate point of NPN transistors $Q1$ and $Q1$ that are connected in series (connection point of the emitter of transistor $Q1$ and the collector of transistor $Q2$). The collector of transistor $A1$ is connected to a power source line while the emitter of transistor $Q2$ is connected to earth. Diodes $D1$ and $D2$ are respectively arranged across the emitter and collector of each of the transistors $Q1$ and $Q2$ to allow current to flow from an emitter side to a collector side. A converter 12 is thus constituted by the reactor $L1$, transistors $Q1$ and $Q1$, and the diodes, $D1$ and $D2$.

[0020] A capacitor $C1$ is arranged between the power source line and earth, being the output of the converter 12, to stabilize the power source line voltage (inverter input voltage).

[0021] A U phase arm made up of NPN transistors $Q3$ and $Q4$ connected in series, a V phase arm made up of NPN transistors $Q5$ and $Q6$ connected in series, and a W phase arm made up of NPN transistors $Q7$ and $Q8$ connected in series are arranged between the power source line and earth. Diodes $D3$ - $D8$ are also arranged across the emitters and collectors of each of transistors

Q3 - Q8, allowing current to flow from an emitter side to a collector side. An inverter 14 is constituted by these transistors Q3 - Q8 and diodes D3 - D8.

[0022] Intermediate points of each or the phase arms are connected to respective phase ends of respective phase coils of a motor M1. Specifically, the motor M1 is a three-phase permanent magnet motor, constructed by connecting one end of U, V and W phase coils in common to a middle point, with the other end of the U phase coil being connected to a mid-point of the transistors Q3 and Q4, the other end of the V phase coil being connected to a mid point of the transistors Q5 and Q6, and the other end of the W phase coil being connected to a mid point of the transistors Q7 and Q8.

[0023] The output voltage of the battery B1 is detected by a transistor 20, a voltage across the two ends of the capacitor C1, namely the inverter input voltage, is detected by a voltage sensor 22, a current value for each phase of the motor M1 is detected by current sensors 24, and these detection values are supplied to a controller 30. The controller 30 controls switching of the transistors Q3 - Q8 of the inverter 14 based on these sensor, detection values and a motor output command etc. to control drive of the motor M1, and also controls switching of the transistors Q1 and Q2 of the converter 12. The controller 30 is constituted by a microcomputer or the like, and controls operation of the inverter 14 and converter 12 by executing a specified program stored in a storage section (constituted by a flash ROM etc.).

[0024] A structural block diagram of the controller 30 is shown in Fig. 2. A motor torque command value, motor current values for each phase detected by the current sensors 22 and an inverter input voltage detected by the voltage sensor 22 are provided to a motor control phase voltage operation unit 40. The motor control phase voltage operation unit 40 calculates voltages for each phase coil of the motor from these input signals and supplies these to an inverter PWM signal converter 42. The inverter PWM signal converter 42 practically generates PWM signals for turning each of the transistors Q3 - Q8 of the inverter 14 on or off and supplies the PWM signals to the bases of the transistors Q3 to Q8 to control switching of the transistors Q3 - Q8 and thereby control current in each phase of the motor M1.

[0025] In this manner, motor drive current is controlled and it is possible to control motor output torque in response to a motor torque command value.

[0026] On the other hand, the motor torque value is also supplied to an inverter input voltage command operation unit 50. The rotational speed of the motor is also supplied to the inverter input voltage command operation unit 50, and the inverter input voltage command operation unit 50 calculates an optimum inverter input voltage value (target value) from motor rotation speed and a motor torque command value.

[0027] This target value is supplied to a converter duty ratio operation unit 52. Inverter input voltage and battery voltage are also supplied to the converter duty ratio op-

eration unit 52, and a duty ratio for setting the inverter input voltage to the target value is calculated from the input voltages. Specifically, the output voltage of the converter 12 is controlled by controlling the on/off duty ratio of the switching elements transistor Q1 and Q2, and duty cycle is calculated so that the inverter input voltage becomes the target value. The calculation results are then supplied to a converter PWM signal converter 54, and this converter PWM signal converter 54 PWM controls the transistors Q1 and Q2 of the converter 12.

[0028] Since electrical power storage for the reactor L1 is made large by making the on duty of the lower transistor Q2 large, it is possible to obtain a higher voltage output. On the other hand, the power source line voltage is lowered by increasing the on duty of the upper transistor Q1. By controlling the duty ratio of the transistors Q1 and Q2, therefore, it is possible to control the power source line voltage at an arbitrary voltage greater than the voltage of the battery B1. In particular, the motor M1 can generate using regeneration, but when the motor M1 is in regeneration the power source line voltage increases which means that the upper transistor Q1 will be turned on and the power source line voltage is maintained as a specified value.

[0029] Here, calculation of the target value in the inverter input voltage command operation unit 50 will be described based on Fig. 3. First of all, an induced voltage constant $K(T)$ is calculated (S11). The relationship of an induced voltage constant $K(T)$ (line voltage per revolution) to torque of a permanent magnet motor is as shown in Fig. 4. When torque is zero, the induced voltage constant $K(T)$ is equivalent to a reverse voltage, and as torque increases the induced voltage constant K also increases. This characteristic is stored internally as a map, and an induced voltage constant $K(T)$ is output according to a motor torque command value (T). This characteristic differs depending on individual motor characteristics, and is obtained in advance for each motor.

[0030] Next, a motor optimum drive voltage V_{mot} is calculated (S12). This motor optimum drive voltage is calculated from the product of the induced voltage constant $K(T)$ and the motor rotational speed N , and a conversion factor α for dc voltage and ac voltage, using the following equation:

$$V_{mot} = K(T) \times N / \alpha$$

The conversion factor is about 0.61 - 0.78.

[0031] That is, a corresponding induced voltage constant $K(T)$ is determined from motor torque, voltage applied to the motor is determined from rotational speed at that time, and inverter input voltage (dc voltage) is obtained by dividing the applied voltage by the conversion factor α .

[0032] Next, it is determined whether the obtained motor optimum drive voltage V_{mot} is larger than the sys-

tem upper limit voltage V_{max} (S13). The upper limit voltage the system is capable of boosting to is limited by the withstand voltage of the switching elements of the converter 12 and inverter 14 and the capacitor C1.

[0033] If the decision in S13 is YES, it is not possible to set the inverter input voltage V_{dc} as it is, and instead inverter input voltage V_{dc} is made V_{max} (S14). On the other hand, if the decision in S13 is NO, there is no problem and so inverter input voltage V_{dc} is made V_{mot} (S15). That is, as shown in Fig. 5, an inverter input voltage target value V_{dc} is raised to the system upper limit voltage V_{max} in response to motor optimum drive voltage V_{mot} which increases with rotational speed, and after reaching the system upper limit voltage V_{max} that target value V_{dc} is maintained at V_{max} .

[0034] In this manner, inverter input voltage target value V_{dc} is calculated in the inverter input voltage command operation unit 50.

[0035] According to this embodiment, optimum applied voltage for the motor at that time is calculated based on motor rotational speed and an output torque command, and an inverter input voltage command value is determined based on this applied voltage. Accordingly, efficient drive of the motor can be achieved through application of an optimum voltage based on drive conditions of the motor at that time. That is, if the inverter input voltage and motor applied voltage at the time of high motor output torque correspond, a correspondingly large current must flow. Energy loss in the inverter and the motor therefore becomes large. Loss due to a resistive component of a line etc. is also large. With this embodiment it is possible to prevent this type of deterioration in efficiency by raising the inverter input voltage. Also, since it is possible to reduce the maximum current amount, it is also possible to miniaturize and reduce the cost of the inverter and motor.

[0036] Also, since optimum voltage is calculated and the inverter input voltage is controlled to the optimum voltage, it is possible to prevent deterioration in efficiency due to rise of the inverter input voltage beyond what is necessary. Specifically, if inverter input voltage is high, the product of current and voltage at that time is increased and switching loss becomes large. Also, since it is possible to maintain output torque in a high rotational speed region of the motor, it is possible as a result to miniaturize and reduce the cost of the motor.

[0037] Next, a flowchart of another embodiment is shown in Fig. 6. With this example, it is assumed that a calculated inverter input voltage V_d is lower than battery voltage.

[0038] First of all battery voltage V_B is taken in from a voltage sensor 20 (S21). Next, the motor torque command and motor rotational speed N are taken in (S22, S23). The inverter input voltage command operation unit 50 then calculates the inverter input voltage target value V_{dc} as described above (S24), and it is determined whether the obtained target value V_{dc} is larger than the battery voltage V_B . If the decision is YES,

boosting should be carried out and so the inverter input voltage target value is made V_{dc} as it is (S26), and the converter duty ratio operation unit 52 calculates duty ratio for the converter 12 (S27). On the other hand, if the decision in S25 is NO, boost by the converter 12 is not necessary. Inverter input voltage target value is then set to V_B (S28) and the upper transistor Q1 of the converter is turned on (S29). In this way, the power source line of the inverter is connected as it is to the battery B1 through the reactor L1.

[0039] Therefore, in this embodiment it is possible to drive the motor using the battery voltage V_B , and also to supply generated power directly to the battery B1 when the motor M1 is in regeneration. This means that it is not necessary to perform switching in the converter 12 and it is possible to reduce switching loss.

[0040] The structure of another embodiment is shown in Fig. 7. With this example, the converter 12 has a three-phase structure. Reactors L1, L2 and L3 and transistors Q1, Q2, Q9, Q10, Q11 and Q12 are provided. That is, the reactors L2 and L3 have one end connected together with the reactor L1 to the positive terminal of the battery B1. Also, the other end of the reactor L2 is connected to a power source line through transistor Q9, and to earth through transistor Q10. Similarly, the other end of the reactor L3 is connected to the power source line through transistor Q11 and connected to earth through transistor Q12. Diodes allowing current to flow in the direction of emitter to collector are also connected to each of the transistors Q9 - Q12.

[0041] In this type of converter 12 also, a high voltage is generated at the other end (inverter side) of the reactors L1, L2 and L3 by switching respective transistors Q1, Q2, Q9, Q10, Q11 and Q12, and it is possible to perform boosting. In particular, by having three phases in this way it is possible to carry out boosting with suppressed ripple by sequentially switching the transistor on and off.

[0042] The structure of yet another embodiment is shown in Fig. 8. With this example, the converter 12 is formed as a full bridge. Specifically, one end of the reactor L1 is not connected directly to the positive electrode of the battery B1, but is connected to the positive electrode through an NPN transistor Q13, and is connected to earth through an NPN transistor Q14. That is, one end of the reactor L1 is connected to the emitter of transistor Q13 and also to the collector of transistor Q14. The collector of transistor Q13 is then connected to the positive electrode of the battery B1, and the emitter of transistor Q14 is connected to earth. Diodes allowing current to flow in a direction from emitter to collector are also connected to these transistors Q13 and Q14.

[0043] With this structure, it is possible to obtain a voltage lower than the battery voltage at the other end of the reactor L1 by switching the transistors Q13 and Q14. In particular, it is possible to obtain an arbitrary output voltage by performing PWM control of the transistors Q13 and Q14.

[0044] In the event that an inverter input voltage target value V_{dc} is lower than battery voltage V_B , it is possible to obtain that target output voltage in the converter 12. In this case also, it is possible to always drive the motor with optimum efficiency. For example, by making the inverter input voltage low, it is possible to increase the period that switching elements of the inverter are full on, and it is possible to reduce switching loss.

[0045] Fig. 9 shows still another embodiment of the present invention. In this example, two inverters and two motors are provided. An inverter 16 is provided between the power source line and earth, as well as the inverter 14, and a motor M2 is connected to this inverter 16. The structure of this inverter 16 is the same as that of the inverter 14, and the motor M2 also has ends of respective phase coils connected to mid points of respective phase arms of the inverter 16. Motor current of each phase arm of the inverter 16 is also detected by current sensors 28 and supplied to the controller 30.

[0046] Operation of this device will now be described based on Fig. 10. First of all, battery voltage V_B is taken in (S31). Next, a motor M1 torque command 1 and motor rotational speed N_1 are taken in (S32, S33). An inverter input voltage target value for driving motor M1 is then calculated (S34). Next, a motor M2 torque command 2 and motor rotational speed N_2 are taken in (S35, S36), and an inverter input voltage target value for driving motor M2 is then calculated (S37).

[0047] It is then determined which of the battery voltage V_B , target value V_{dc1} and target value V_{dc2} is the largest (S38).

[0048] If it is determined that V_B is the largest, the inverter input voltage target value is set to V_B (S39), and the upper transistor Q1 of the converter is turned on (S40).

[0049] If it is determined in S38 that V_{dc1} is the largest, the inverter input voltage target value is set to V_{dc1} (S41), and the duty ratio of the converter 12 is calculated (S42). If it is determined in S38 that V_{dc2} is the largest, the inverter input voltage target value is set to V_{dc2} (S43), and the duty ratio of the converter 12 is calculated (S44).

[0050] In this way, the inverter input voltage target value is set to whichever of V_{dc1} and V_{dc2} is the largest voltage. When the inverter input voltage is smaller than an optimum value loss is larger than when the input voltage is larger than the optimum voltage, and with this embodiment it is possible to achieve efficient motor drive

INDUSTRIAL APPLICABILITY

[0051] The present invention can be used in drive control for a traveling motor of a hybrid vehicle or an electric vehicle.

Claims

1. A motor drive controller, for supplying output of a dc power source to a motor through an inverter and controlling drive of a motor, comprising:

a converter for voltage converting output voltage from the dc power source for supply to the inverter; and

a control section for controlling supply current to the motor through PWM control of the inverter,

the converter comprising:

a reactor connected at one end to the dc power source, and at least two switching elements, being an upper switching element connecting the other end of the reactor to a power source side of the inverter and a lower switching element connecting to an earth side of the inverter, wherein

the control section calculates an inverter input voltage target value appropriate to efficient motor drive in response to rotational speed of the motor and a target output torque, and performs PWM control of the converter switching elements in order to achieve the input voltage target value.

2. The motor drive controller of claim 1, wherein the converter has a three phase structure provided with three sets of the reactor and two switching elements.

3. The motor drive controller of claim 1 or claim 2, wherein, when the inverter input voltage target value is lower than the dc source voltage, the upper switching element of the inverter is turned on and the lower switching element is turned on

4. The motor drive controller of claim 1 or claim 2, wherein the converter has a full bridge configuration with both ends of a battery and one end of a reactor being connected through two switching elements.

5. The motor drive controller of any one of claim 1 to claim 4, wherein a separate inverter for supplying current to a separate motor is connected to the output of the converter, and the control section outputs a higher voltage of two inverter input target voltages calculated from rotational speeds and target outputs of the two motors.

6. The motor drive controller of any one of claim 1 to claim 5, wherein, when the calculated inverter input target voltage exceeds a specified upper limit value, the control section sets the input target voltage to

the upper limit value.

7. A motor drive control method, for a two motor system comprising a converter, including a reactor, having one end connected to a dc power source, and at least two switching elements, being an upper switching element connecting the other end of the reactor to a power source side of an inverter, and a lower switching element connecting to an earth side of the inverter, two inverters for receiving output from the converter and converting to a specified alternating current, and two motors respectively driven by alternating current from the two inverters, wherein
- inverter input voltage target values suitable for efficient drive of the two motors are calculated in response to rotation speed and target output torque of the two motors, and of the two calculated inverter input voltage target values, a higher voltage is selected as a target value and the switching elements of the inverter are subjected to PWM control.
8. A motor drive control program for a two motor system, comprising a converter, including a reactor, having one end connected to a dc power source, and at least two switching elements, being an upper switching element connecting the other end of the reactor to a power source side of an inverter, and a lower switching element connecting to an earth side of the inverter, two inverters for receiving output from the converter and converting to a specified alternating current, two motors respectively driven by alternating current from the two inverters, and a control section for controlling switching of the switching elements of the converter, wherein the control section calculates inverter input voltage target values suitable for efficient drive of the two motors in response to rotation speed and target output torque of the two motors, adopts a higher voltage of the two calculated inverter input voltage target values as a target value, and subjects the switching elements of the inverter to PWM control so that converter output becomes the adopted target value.

Fig. 1

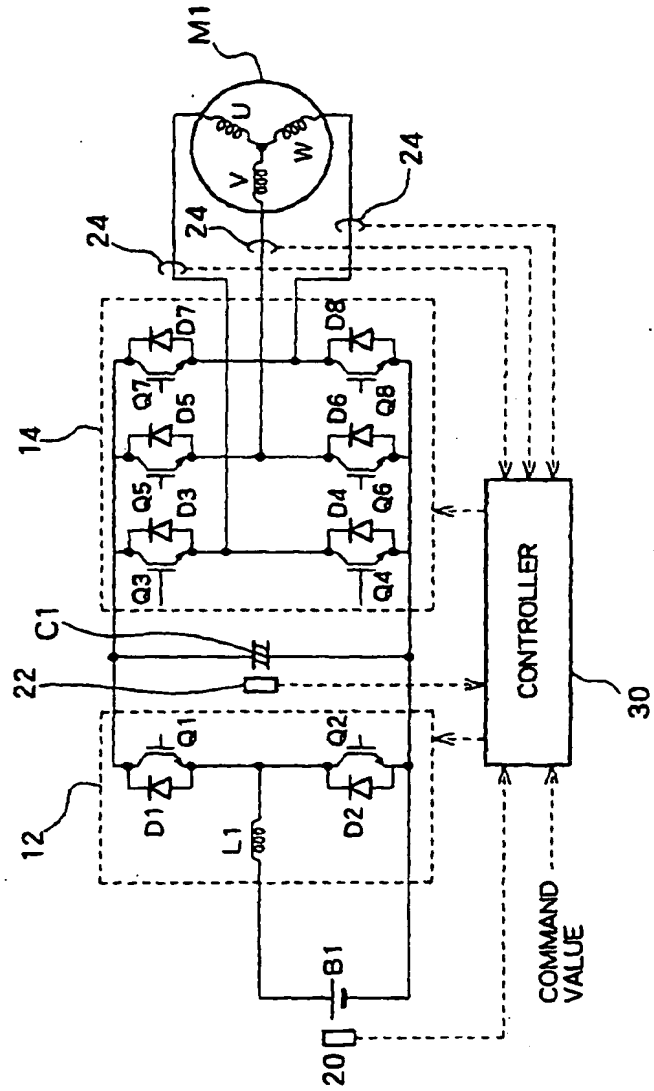


Fig. 2

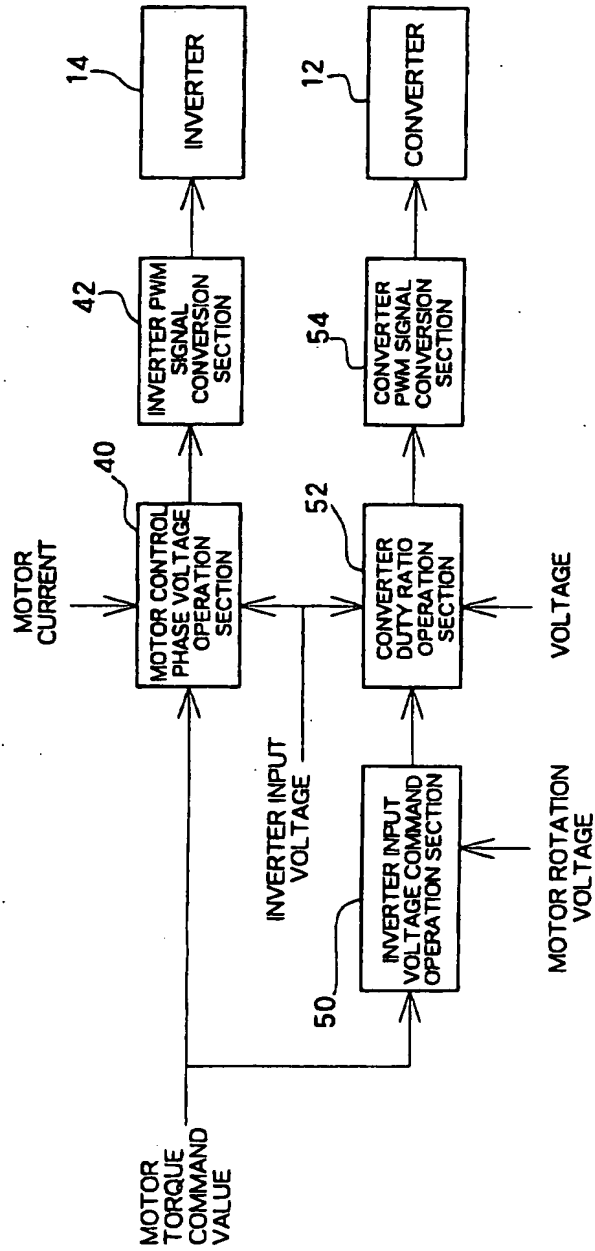


Fig. 3

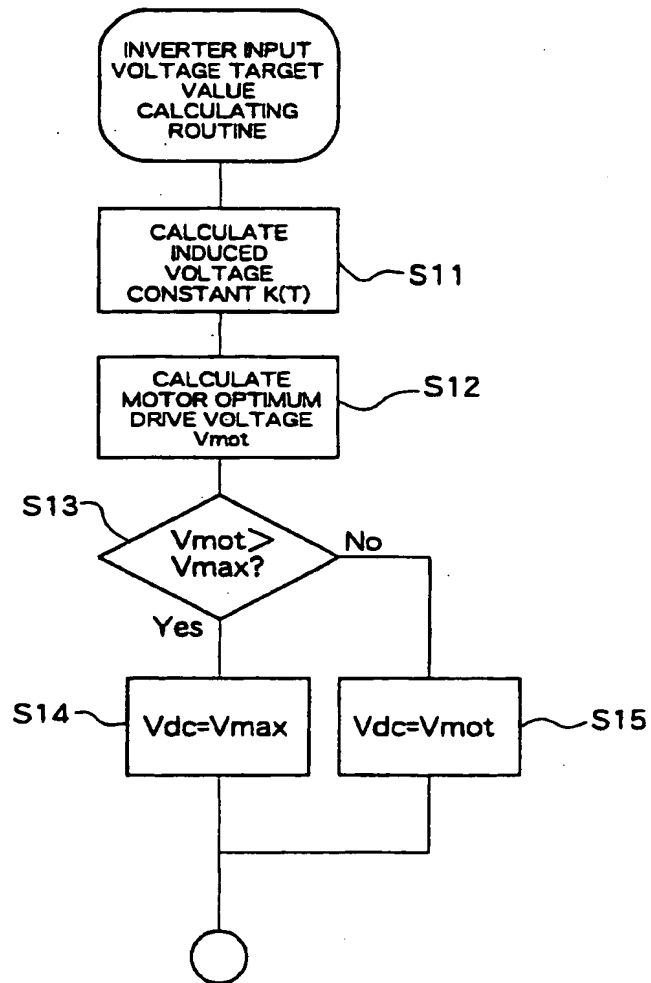


Fig. 4

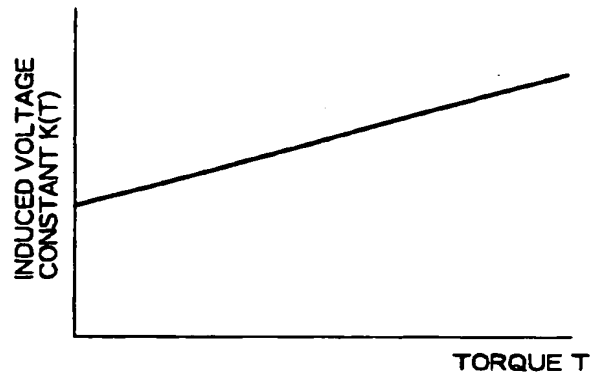


Fig. 5

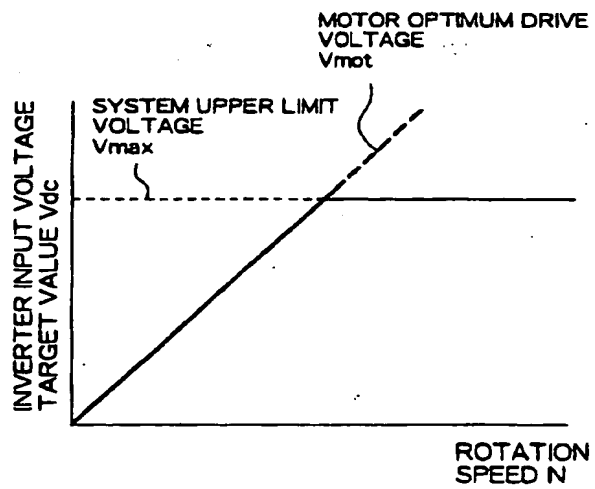


Fig. 6

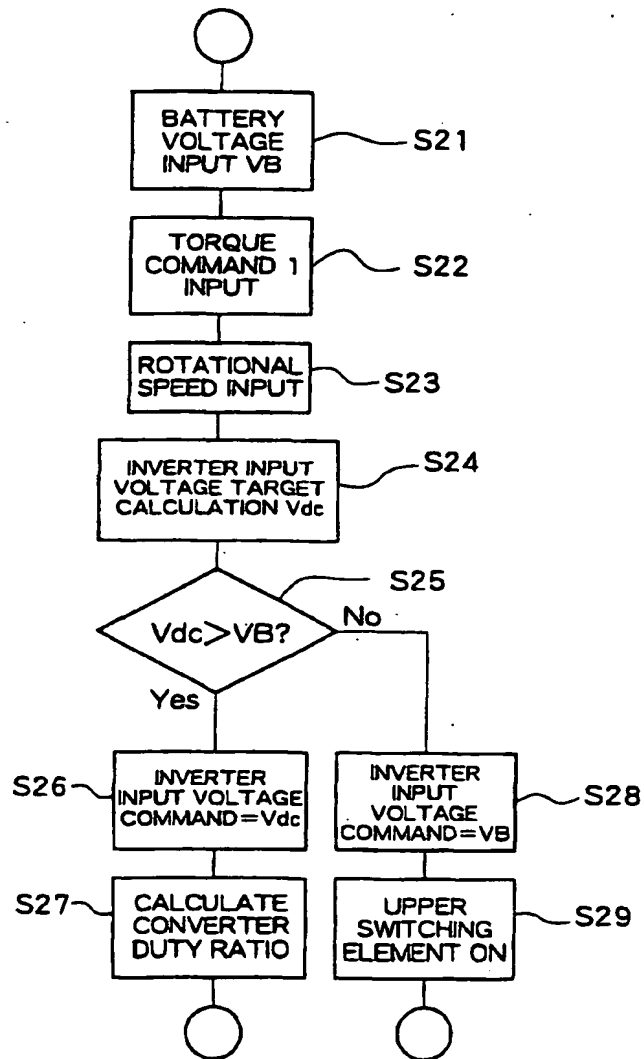


Fig. 7

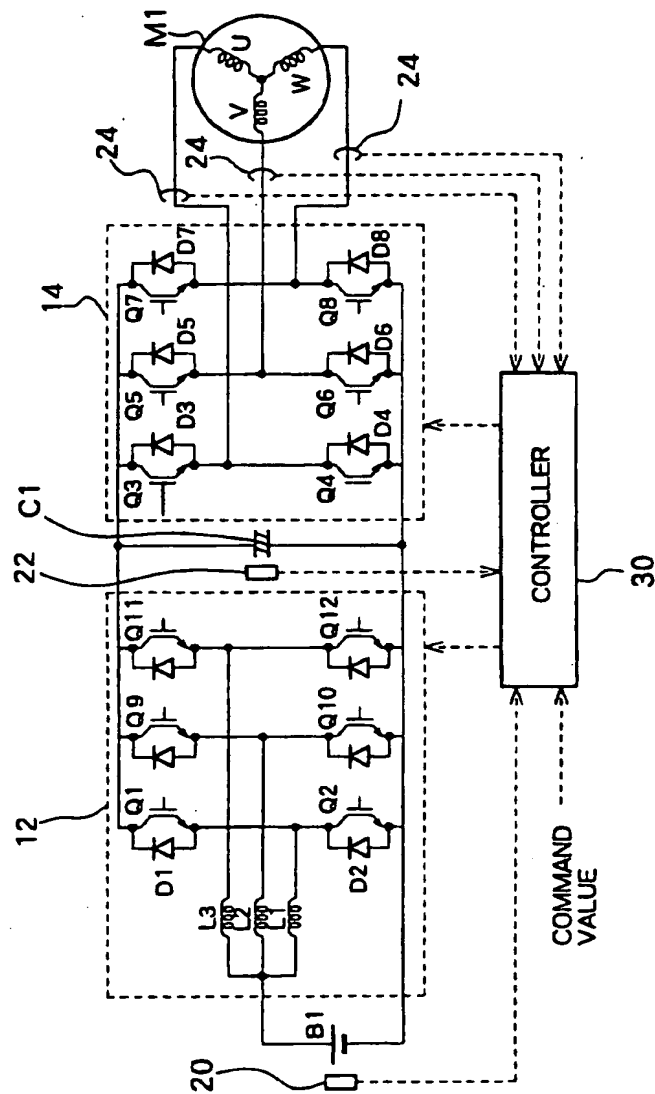


Fig. 8

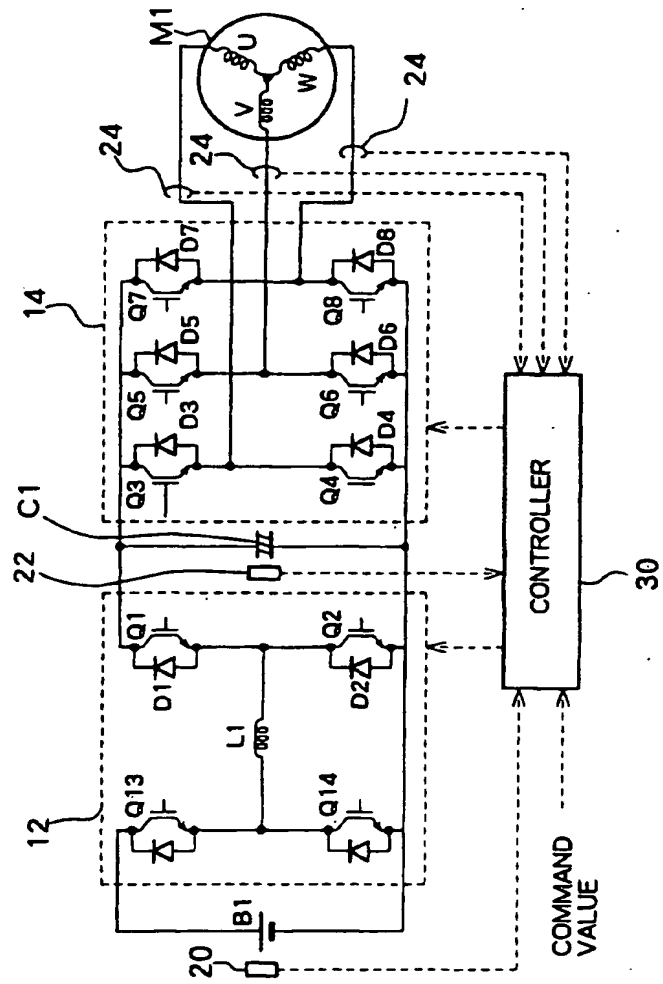


Fig. 9


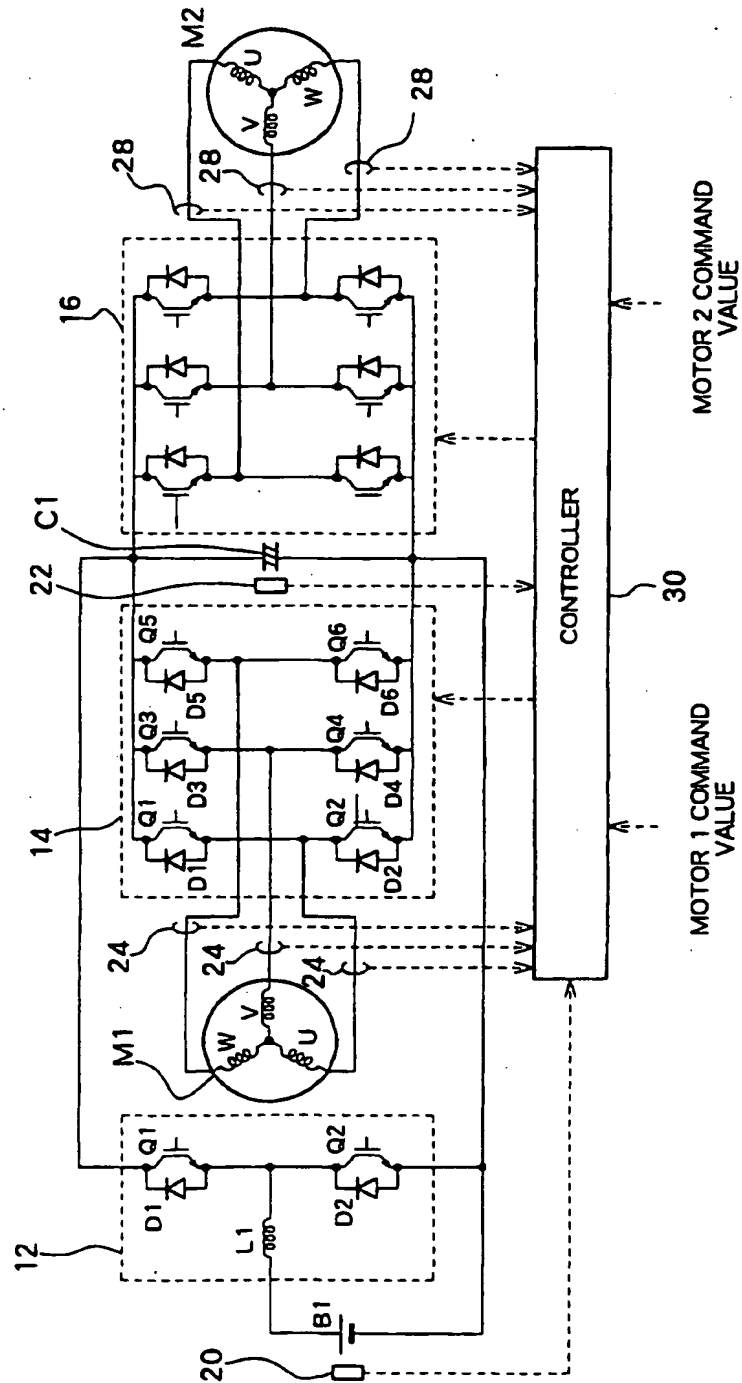


Fig. 10

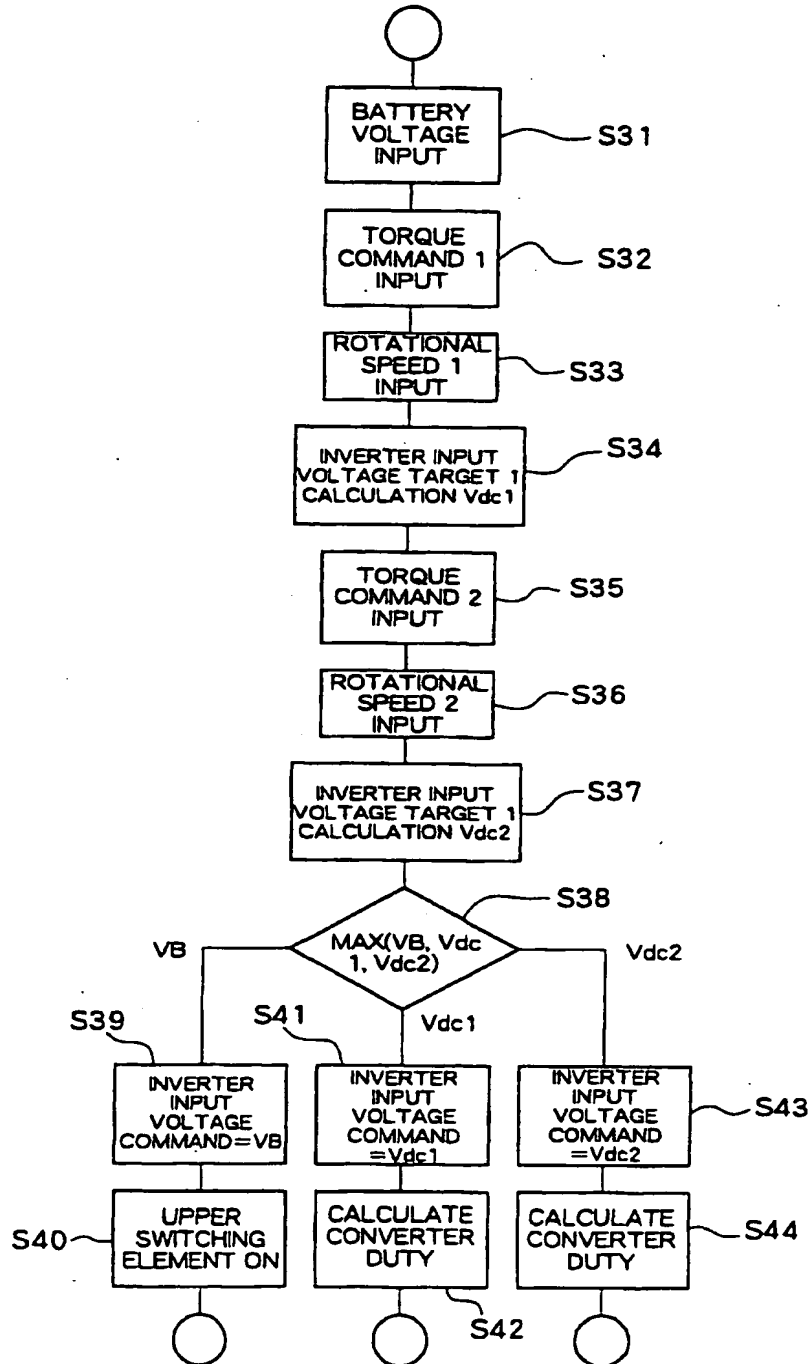

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP02/07800

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl. ⁷ H02M7/48		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl. ⁷ H02M7/48		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Toroku Jitsuyo Shinan Koho 1994-2002 Kokai Jitsuyo Shinan Koho 1971-2002 Jitsuyo Shinan Toroku Koho 1996-2002		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2001-157487 A (Nissan Motor Co., Ltd.), 08 June, 2001 (08.06.01), (Family: none)	1-8
Y	JP 11-299290 A (Hitachi, Ltd.), 29 October, 1999 (29.10.99), (Family: none)	1-8
Y	JP 11-69882 A (Mitsubishi Electric Corp.), 09 March, 1999 (09.03.99), (Family: none)	1-8
Y	US 6236583 B1 (Nissan Motor Co., Ltd.), 22 May, 2001 (22.05.01), & EP 1052769 A2 & JP 2000-324891 A & JP 2000-324892 A	1-8
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
Date of the actual completion of the international search 22 August, 2002 (22.08.02)		Date of mailing of the international search report 03 September, 2002 (03.09.02)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP02/07800

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 10-127050 A (Denso Corp.), 15 May, 1998 (15.05.98), (Family: none)	1-8

Form PCT/ISA/210 (continuation of second sheet) (July 1998)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.